


Vertical or horizontal mounting

Technical data


Item	Oil flow	Capacity	Weight	Voltage	Frequency	Current absorption	Power	Ø Fan	Air flow	Noise level	Rpm
	[l/min]	[l]	[kg]	[V]	[Hz]	[A]	[W]	[mm]	[m <sup>3</sup> /h]	[dB(A)]	
<b>HY235.1-07A</b>	70-280	20,2	100	230/400	50/60	3,9	800	630	5255	81	920

Performance

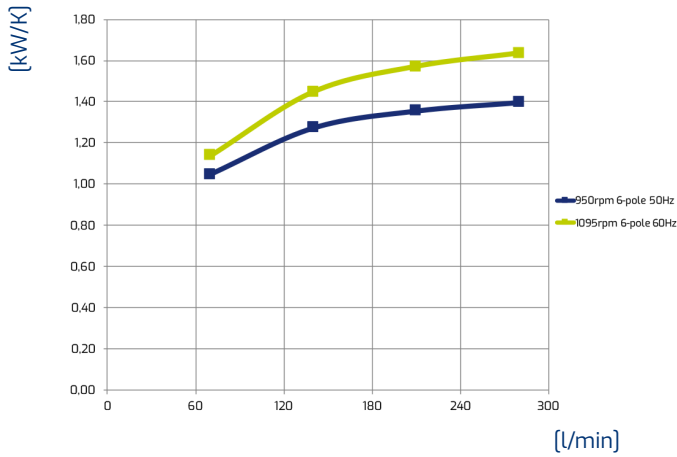

Oil T 80°C  
T Amb. 40°C  
1 kW = 860 Kcal/h - 1 HP = 0,75 kW

Pressure drop

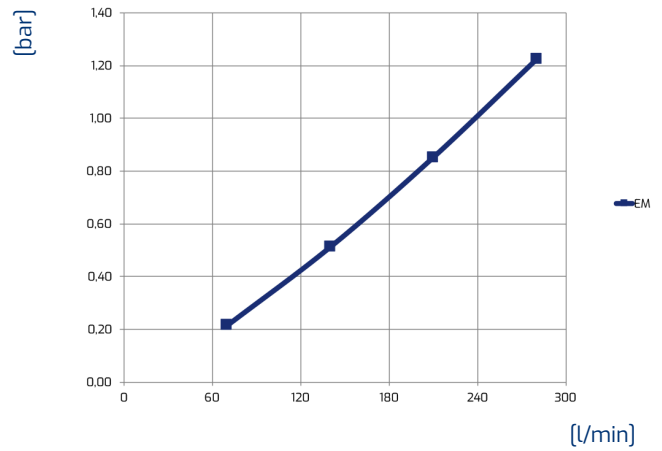

ISO VG 32 at 40°C

Viscosity - ISO VG 32 Oil

Oil	22	32	46	68	150
Correction factor	0,8	1	1,2	1,6	3